U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

OMB No. 1660-0008 Expiration Date: November 30, 2018

ELEVATION CERTIFICATE

Important: Follow the instructions on pages 1-9.

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

SECTION A - PROPERTY INFORMATION					FOR INSU	RANCE COMPANY USE		
A1. Building Owner's Name Policy Number: CHURCH/PARKS					ber:			
A2. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Company NAIC Number: 16209 REDINGTON DR					IAIC Number:			
City REDINGTON I	BEACH			State Florida			ZIP Code 33708	
		nd Block Numbers, Ta TION TO REDINGTO			gal Desc	ription, etc.)		
A4. Building Use (e.g., Resider	ntial, Non-Residential,	Addition	, Accessory,	etc.) F	RESIDENTIAL	-	
A5. Latitude/Longi	tude: Lat. 2	7.813787	Long8	32.813564		Horizontal Da	tum: NAD	1927 × NAD 1983
A6. Attach at least	2 photograp	hs of the building if the	e Certific	ate is being u	sed to o	btain flood ins	urance.	
A7. Building Diagra	am Number	7						
A8. For a building	with a crawls	pace or enclosure(s):						
a) Square foo	tage of crawl	space or enclosure(s)		1	1599.00	sq ft		
b) Number of p	oermanent flo	ood openings in the cr	awispace	e or enclosure	e(s) withi	n 1.0 foot abo	ve adjacent gra	ade <u>12</u>
c) Total net ar	ea of flood o	penings in A8.b	4	740.00 sq in	1			
d) Engineered	l flood openir	ngs? ⊠ Yes 🗌 N	10					
A9. For a building v	vith an attach	ned garage:						
a) Square foot	age of attach	ned garage		N/A sq ft				
b) Number of p	b) Number of permanent flood openings in the attached garage within 1.0 foot above adjacent grade N/A							
c) Total net an	ea of flood o	penings in A9.b		N/A sq	in			
d) Engineered	flood openin	gs? Yes 🗆	lo					
	SE	CTION B - FLOOD	INSURA	NCE RATE	MAP (F	IRM) INFORI	MATION	
B1. NFIP Commun	-	Community Number H 125140		B2. County PINELLAS	Name	·		B3. State Florida
D4 Man/Danak	DE CUES	B6. FIRM Index	חד בוב	M Donol	BO Ela	and BC). Base Flood E	loyation(s)
B4. Map/Panel Number	B5. Suffix	Date	Effe	RM Panel ective/	B8. Flo Zone(s			e Base Flood Depth)
12103C0179	G	08-18-2009	09-03-2	vised Date 2003	AE	10	.0'	4
B10. Indicate the source of the Base Flood Elevation (BFE) data or base flood depth entered in Item B9: [FIS Profile FIRM Community Determined Other/Source:								
B11. Indicate elevation datum used for BFE in Item B9: NGVD 1929 X NAVD 1988 Other/Source:								
B12. Is the building located in a Coastal Barrier Resources System (CBRS) area or Otherwise Protected Area (OPA)? 🗌 Yes 🗵 No								
Designation I	-		CBRS	☐ OPA				-

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the corresponding information from Section A.				FOR INSURANCE COMPANY USE	
16209 REDINGTON DR				Policy Number:	
	State ZIP Florida 337	Code 08	Company	NAIC Number	
SECTION C - BUILDING	ELEVATION INFORMAT	TION (SURVEY RE	QUIRED)		
C1. Building elevations are based on: Construct *A new Elevation Certificate will be required when C2. Elevations – Zones A1–A30, AE, AH, A (with BFI Complete Items C2.a–h below according to the base Benchmark Utilized: AG0837	n construction of the buildi E), VE, V1–V30, V (with B	FE), AR, AR/A, AR/ in Item A7. In Puerto	AE, AR/A1	Finished Construction A30, AR/AH, AR/AO. -, enter meters.	
Indicate elevation datum used for the elevations i NGVD 1929 X NAVD 1988 Other Datum used for building elevations must be the s	er/Source:			the measurement used.	
 a) Top of bottom floor (including basement, craw 	dspace, or enclosure floor		3.83 ×		
b) Top of the next higher floor			16.58 ×		
c) Bottom of the lowest horizontal structural men	nber (V Zones only)		N/A 🗵	<u> </u>	
d) Attached garage (top of slab)			N/A ×	feet meters	
 e) Lowest elevation of machinery or equipment s (Describe type of equipment and location in C 	servicing the building omments)		4.00		
f) Lowest adjacent (finished) grade next to build	ing (LAG)		2.20	feet meters	
g) Highest adjacent (finished) grade next to build	ling (HAG)		3.20	feet meters	
 h) Lowest adjacent grade at lowest elevation of of structural support 	deck or stairs, including		N/A 🔀] feet	
SECTION D – SURVEYOR, ENGINEER, OR ARCHITECT CERTIFICATION					
This certification is to be signed and sealed by a land I certify that the information on this Certificate represe statement may be punishable by fine or imprisonment Were latitude and longitude in Section A provided by	nts my best efforts to inter under 18 U.S. Code, Sec	pret the data availa tion 1001.	ble. I unde	tify elevation information. rstand that any false eck here if attachments.	
Certifier's Name	License Number				
JOHN R BEACH	2984			0	
Title P.L.S. Company Name				Place	
JOHN R. BEACH & ASSOCIATES, INC.			-	C CONV N	
Address 911 ST PETERSBURG DR W			1 10	DATE OF	
City OLDS M AR	State Florida	ZIP Code 34677			
Signature AD Beach	Date 08-02-2018	Telephone (813) 854-1276	Ext.		
Copy all pages of this Elevation Certificate and all attach	ments for (1) community of	ficial, (2) insurance a	agent/comp	any, and (3) building owner.	
Comments (including type of equipment and location, per C2(e), if applicable) C2(e) = ELEVATOR (INSIDE FOYER). ELEV OF FOYER (ACCESS TO LIVING AREA ONLY = 4.00)Data in C2.f-h is only accurate to 0.1'; ignore the second decimal place, as this is automatically added by the FEMA form. ENTIRE LOWER FLOOR USED FOR PARKING/STORAGE/ACCESS, WITH MAIN LIVING ON UPPER FLOORS. FLOOD VENTS ARE CRAWL SPACE DOOR SYSTEMS MODEL 1616CS, CERTIFIED FOR 395 SQ. IN. FLOOD VENT CERTIFICATION ATTACHED.					

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2018

MPORTANT: In these spaces, copy the corresponding information from Section A. FOR INSURANCE COMPANY USE					
Building Street Add 16209 REDINGTO	dress (including Apt., Unit, Suite, and N DR	d/or Bldg. No.) or P.O. R	oute and Box No.	Policy Number:	
City REDINGTON BEA			IP Code 3708	Company NAIC Number	
	SECTION E – BUILDING EL FOR ZON	EVATION INFORMAT E AO AND ZONE A (W		REQUIRED)	
For Zones AO and A (without BFE), complete Items E1–E5. If the Certificate is intended to support a LOMA or LOMR-F request, complete Sections A, B, and C. For Items E1–E4, use natural grade, if available. Check the measurement used. In Puerto Rico only, enter meters.					
E1. Provide elevation information for the following and check the appropriate boxes to show whether the elevation is above or below the highest adjacent grade (HAG) and the lowest adjacent grade (LAG).					
crawlspace	om floor (including basement, e, or enclosure) is om floor (including basement,		_	s above or below the HAG,	
crawlspace	e, or enclosure) is		feet _ meter	_	
the next highe	iagrams 6–9 with permanent flood or floor (elevation C2.b in of the building is	penings provided in Sec	tion A Items 8 and/or feet meter		
E3. Attached gara	ge (top of slab) is		feet _ meter	s above or below the HAG.	
E4. Top of platform servicing the b	n of machinery and/or equipment ouilding is		feet _ meter	s above or below the HAG.	
	If no flood depth number is available agement ordinance? Tyes			cordance with the community's certify this information in Section G.	
	SECTION F - PROPERTY OWI	NER (OR OWNER'S RE	PRESENTATIVE) CE	RTIFICATION	
The property owne community-issued	r or owner's authorized representativ BFE) or Zone AO must sign here. Th	ve who completes Section ne statements in Section	ons A, B, and E for Zons A, B, and E are con	ne A (without a FEMA-issued or rect to the best of my knowledge.	
Property Owner or	Owner's Authorized Representative	s Name			
Address		City	Sta	ate ZIP Code	
Signature		Date	Te	lephone	
Comments					
				Check here if attachments.	

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy the corresponding information from Section A. FOR INSURANCE COMPAN						
Building Street Address (including Apt., Unit, S 16209 REDINGTON DR	Policy Number:					
City REDINGTON BEACH	State Florida	ZIP Code 33708	Company NAIC Number			
SECTION	ON G - COMMUNITY INFO	RMATION (OPTIONA	L)			
The local official who is authorized by law or o Sections A, B, C (or E), and G of this Elevation used in Items G8–G10. In Puerto Rico only, er	n Certificate. Complete the a					
G1. The information in Section C was takengineer, or architect who is authorized data in the Comments area below.)	engineer, or architect who is authorized by law to certify elevation information. (Indicate the source and date of the elevation					
G2. A community official completed Sect or Zone AO.	ion E for a building located in	n Zone A (without a F	EMA-issued or community-issued BFE)			
G3. The following information (Items G4-	-G10) is provided for commu	unity floodplain manag	ement purposes.			
G4. Permit Number	G5. Date Permit Issued	G	Date Certificate of Compliance/Occupancy Issued			
G7. This permit has been issued for:	New Construction Sub	stantial Improvement				
G8. Elevation of as-built lowest floor (includin of the building:	g basement)		eet meters Datum			
G9. BFE or (in Zone AO) depth of flooding at	the building site:		eet meters Datum			
G10. Community's design flood elevation:			feet meters Datum			
Local Official's Name	Titl	е				
Community Name	Tel	ephone				
Signature	Da	te				
Comments (including type of equipment and lo	cation, per C2(e), if applicab	le)				
			Check here if attachments.			

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE

See Instructions for Item A6.

OMB No. 1660-0008 Expiration Date: November 30, 2018

IMPORTANT: in these spaces, copy	FOR INSURANCE COMPANY USE		
Building Street Address (including Apt. 16209 REDINGTON DR	Policy Number;		
City	State	ZIP Code	Company NAIC Number
REDINGTON BEACH	Florida	33708	

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.

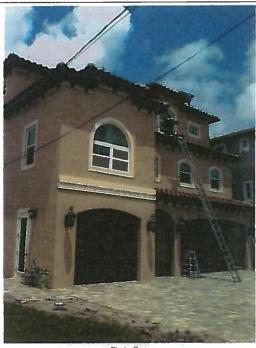


Photo One Caption FRONT

Clear Photo One



Photo Two

Photo Two Caption FRONT/SIDE

Clear Photo Two Form Page 5 of 6

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE

Continuation Page

OMB No. 1660-0008

Expiration Date: November 30, 2018

IMPORTANT: In these spaces, copy t	FOR INSURANCE COMPANY USE		
Building Street Address (including Apt., 16209 REDINGTON DR	Policy Number:		
City	State	ZIP Code	Company NAIC Number
REDINGTON BEACH	Florida	33708	

If submitting more photographs than will fit on the preceding page, affix the additional photographs below. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8.



Photo Three

Photo Three Caption SIDE/REAR

Clear Photo Three

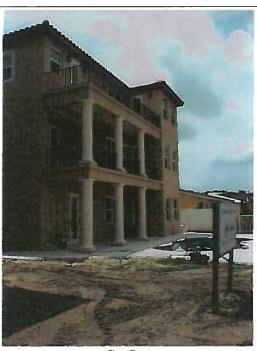


Photo Four

Photo Four Caption REAR

Clear Photo Four Form Page 6 of 6

Plastic - No Rust or Rot Crawlspace Flood Vent for Homes (New Construction & Replacement)


Easy Access • Modular Use • Can Be Painted

Flood Vent (No Cover)

One-piece ventplate with easy to insert vermin screen and fixed louver. Made of durable PVC/ABS plastic (no rust or rot) with a UV retardant treatment. FEMA compliant, engineered certified.

No cover to allow the automatic entry and exit of floodwaters. Quick and easy to install.



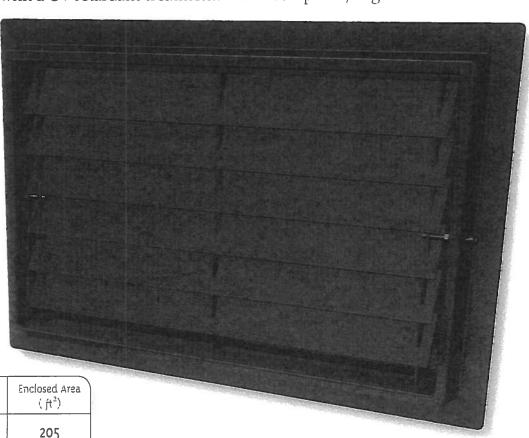

MODEL	HxW (in)	Net Area (in²)	Enclosed Area (ft²)
816CS	8 x 16	105	205
1220CS	12 X 20	235	500
1232CS	12 X 32	305	645
1616CS	16 x 16	180	395
1624CS	16 x 24	310	670
1632CS	16 x 32	405	835
2032CS	20 X 32	630	1240
2424CS	24 X 24	570	1230
2436CS	24 x 36	850	1765



Plastic Crawlspace Doors & Vents Plastic Crawlspace Louvers/Screens Engineered FEMA Flood Vents

- The bottom of the flood vent opening cannot be higher than 12 inches above grade.
- A minimum of two vents for each enclosed area (crawlspace, garage, or rooms within a garage), and each flood vent must be on at least two different sides exterior walls.
- A minimum of one engineered square inch of opening for each square foot of enclosed area for an engineered flood vent. Or a minimum of one square inch of net open area for each square foot of enclosed area for non-engineered openings.
- An engineered certificate of flood openings is required for all engineered flood vents without ICC-ES certification.

MODEL	DOOR OPENING - H x W	TOTAL DIMENSION wth APPROXIMATE 3" FRAME	
816CS	8" H x16" W	ı ½"Frame 11" H x 19" W	
1220CS	12" H x 20" W	17 ³ / ₄ " H × 26" W	
1232CS	12" H x 32" W	17 ³ / ₄ " H × 37 1/2" W	
1616CS	16" H × 16" W	21 3/4" H × 21 3/4" W	
1624CS	16" H x 24" W	21 ³ / ₄ " H × 30" W	
1632CS	16" H x 32" W	21 ³ / ₄ " H × 37 1/2" W	
2032CS	20" H × 32" W	25 1/2" H x 37 3/4" W	
2424CS	24" H × 24" W	29 3/4" H × 30" W	
2436CS	24" H × 36" W	29 ¾" H × 41 ¾" W	

- All Flood Vents are surface mount meaning they mount over the foundation opening
- All Flood Vents are paintable with a plastic adherent paint. We suggest Krylon Spray Paint and wait an hour then use Krylon Clear Coat for a lasting finish
- The frame / flange can be trimmed if needed since our Flood Vents are made of durable ABS Plastic
- All Flood Vents come with mounting hardware, frame, screen and louver
- To remove the louver just pull the pins out of the left and right side if you need access to the crawlspace

Certification of Engineered Flood Openings

In accordance with the Code of Federal Regulations for the National Flood Insurance Program

I hereby certify that the Crawl Space Door Systems flood vents 816CS, 1220CS, 1232CS, 1616CS, 1624CS, 1632CS, 2032CS, 2424CS, and 2436CS are designed in accordance with the requirements of the Code of Federal Regulations for the National Flood Insurance Program (NFIP) to provide automatic equalization of hydrostatic flood forces by allowing for the entry and exit of floodwaters, when properly installed and sized as set forth below. Vent opening measurements were measured and certified by Mr. Christopher Mark Loney, Virginia P.E. NO. 029000. Detailed calculations were prepared as outlined In "Review of certification of Engineered Flood Openings," prepared by Dr. Georg Reichard, Associate Professor of Building Construction, Virginia Tech (available upon request from Crawl Space Door Systems, Inc. billy@crawlspacedoors.com)

Design Characteristics

Section 2.6.2.2 of ASCE/SEI 24-05 provides an equation to determine the required net area of engineered openings (A_o) for a given enclosed area (A_e). This equation is based on the hydraulic formula for the flow rate across sharp edged orifices. I have utilized this equation to calculate 1) the restricted flow rate through the main frame opening in case the louver is blown out during a flood event; 2) the flow rate through the individual openings between louver blades; and 3) the flow rate through projected openings between louver blades following hydraulic short-tube theory. The maximum total enclosed area (A_e) that can be serviced by a single vent has then been determined by utilizing the lowest flow rate of the three assessed scenarios for each vent and is listed in Table 1. These values are based on the following assumptions:

- In absence of reliable data, the rates of rise and fall have been assumed at a minimum rate of 5 feet/hour;
- The (maximum) difference between the exterior and interior floodwater levels shall not exceed 1 foot during base flood conditions;
- A factor of safety of 5 has been assumed, which is consistent with design practices related to protection of life and property;
- The net area of openings (A_o) as provided by the manufacturer.

Installation	Requirements and	l Limitations
--------------	------------------	---------------

This certification will be voided if the following installation requirements and limitations are not enforced:

- There shall be a minimum of two openings on different sides of each enclosed area subject to flooding;
- The bottom of all openings shall be no higher than one foot given net are above the higher of the interior or exterior grade that is immediately under each opening;
- H x W Model $[ft^2]$ [in2] [in] 816CS 8 x 16 105 205 1220CS 12 x 20 235 500 1232CS 12 x 32 305 645 1616CS 16 x 16 180 395 П 1624CS 16 x 24 310 670 16 x 32 1632CS 405 835 2032CS 20 x 32 630 1240 2424CS 24 x 24 570 1230 2436CS 24 x 36 850 1765
- Table 1 Maximum total enclosed area (A_e) that can be serviced by each individual model based on the given net area of engineered openings (A_o)
- No temporary (e.g. during cold weather) or permanent solid cover may be placed into or over the flood vent that would block the automatic entry or exit of floodwaters at any time;
- Where data or analyses indicate more rapid rates of rise and fall, the required number of openings shall be increased to account for those different conditions. The number or size of the openings may be decreased if data or analyses indicate rates of rise and fall are less than 5 feet per hour.

Certifying Design Professional

Name Steve A. Geci Title President

Company Geci & Associates Engineers, Inc.

Address 2950 N 12th Avenue, Pensacola, FL 32503

License Florida License No. 33658

STATE OF

Date: 1/29/17

ONAL ENGINEERS

Identification of the Building and Installed Flood Vents (By Others)

The flood vent models marked in Table 1*) are being installed at the following building:

Building Address